

| MODEL | KH-P 36 GF | |
|----------------------|------------|-----------|
| Prime Power (50Hz) | 36 KW | 45 KVA |
| Standby Power (50Hz) | 39.6 KW | 49.50 KVA |

Standard Features

General Features:

- ◆ Engine (Perkins 1103A-33TG1)
- ◆ Radiator 50OC max, fans are driven by belt, with safety guard
- ◆ 24V charge alternator
- ◆ Alternator: single bearing alternator IP23, insulation class H/H
- ◆ Absorber
- ◆ Dry type air filter, fuel filter, oil filter
- ◆ Main line circuit breaker
- ◆ Standard control panel
- ◆ 12V batteries, rack and cable
- ◆ Ripple flex exhaust pipe, exhaust siphon, flange,muffler
- ◆ User manual



Generator Ratings

| Voltage(V) | | Hz | Phase | P.F (cos ϕ) | Prime Amps (A) | Prime Ratings (KW/KVA) | |
|------------|-----|----|-------|----------------------|-------------------|---------------------------|----|
| 440 | 254 | 50 | 3 | 0.8 | 59.05 | 36 | 45 |
| 415 | 240 | 50 | 3 | 0.8 | 62.61 | 36 | 45 |
| 400 | 230 | 50 | 3 | 0.8 | 64.95 | 36 | 45 |
| 380 | 220 | 50 | 3 | 0.8 | 68.37 | 36 | 45 |

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

Standard Features

Kaihua Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested. Warranty is according to our standard conditions: a, 12 months, counted on the day KAIHUA sold to the first buyer; b, One year after installation; c, 1000 running hours (accumulated); subject to the earlier one. Service and parts are available from kaihua Power or distributors in your location.

ENGINE DATA

| | |
|-----------------------|------------------------------|
| Manufacturer / Model: | Perkins 1103A-33TG1, 4-cycle |
| Air Intake System: | Turbocharged |
| Fuel System: | Direct Injection |
| Cylinder Arrangement: | 3 in line |
| Displacement: | 3.3L |
| Bore and Stroke: | 105*127 (mm) |
| Compression Ratio: | 17.25:1 |
| Rated RPM: | 1500rpm |
| Max. Standby Power: | 46.5KW |
| Governor Type: | Mechanical |

Exhaust system

| | |
|----------------------|------------------------|
| Exhaust Gas Flow: | 7.7m ³ /min |
| Exhaust Temperature: | 537°C |
| Max Back Pressure: | 10kPa |

Air Intake System

| | |
|--------------|------------------------|
| Consumption: | 3.1m ³ /min |
|--------------|------------------------|

Fuel System

| | |
|--------------------------|---------|
| 100%(Prime Power) Load: | 10.7L/h |
|--------------------------|---------|

Oil System

| | |
|----------------------------|--------|
| Total Oil Capacity: | 8.3L |
| Oil Pressure at Rated RPM: | 276kPa |

Cooling System

| | |
|-------------------------|---------|
| Total Coolant Capacity: | 10.2L |
| Thermostat: | 82-93°C |
| Max Water Temperature: | 110°C |

ALTERNATOR SPECIFICATION

Compliance with GB755, BS5000, VDE0530, NEMAMG1-22, IED34-1, CSA22.2 and AS1359 standards.

Alternator Data

| | |
|---------------------------------|---|
| Manufacturer: | STAMFORD/MARATHON/KAIHUA |
| Number of Phase: | 3 |
| Connecting Type: | 3 phase and 4 wires,"Y" type connecting |
| Number of bearing | 1 |
| Power factor | 0.8 |
| Protection grade | IP23 option,upon request |
| Altitude | ≤1000m |
| Exciter type | Brushless,self-exciting |
| Insulation class | H |
| Telephone influence factor(TIF) | ≤50 |
| THF | ≤2% |
| Alternator Capacity: | 45 KVA |
| Alternator Efficiencies | 85% |
| Air Cooling Flow: | 0.09m ³ /s |

GENERATING SET DATA

| | |
|------------------------------------|-------|
| Voltage Regulation: | ≥±5% |
| Voltage Regulation, Stead State: | ≤±1% |
| Sudden Voltage Warp: | ≤+25% |
| Sudden Voltage Warp: | ≤-20% |
| Voltage Stable Time: | ≤6S |
| Voltage unbalance: | ≤1% |
| Frequency Regulation, Stead State: | ≤5% |
| Frequency Waving: | ≤1.5% |
| Sudden Frequency Warp: | ≤+12% |
| Transient frequency deviation: | ≤-10% |
| Frequency Recovery Time: | ≤5S |

Standard Features

- ◆Standard Auto Control System
- ◆Starting batteries
- ◆Exhaust System
- ◆MCCB
- ◆ Battery switch
- ◆Shock pad
- ◆Special tool
- ◆Oil Drain Valve
- ◆Documents

Options

ENGINE

- ◇Engine Heater
- ◇Battery Charger
- ◇Air preheater

ALTERNATOR

- ◇Alternator Heater
- ◇PMG

ELECTRICAL SYSTEM

- ◇Remote Control Panel
- ◇Automatic Transfer Switch
- ◇Paralleling System


TYPE

- ◇Rainproof Type
- ◇Soundproof Type
- ◇Trailer Type

OTHER

- ◇Spare Parts
- ◇Daily Fuel Tank

Dimension & Weight

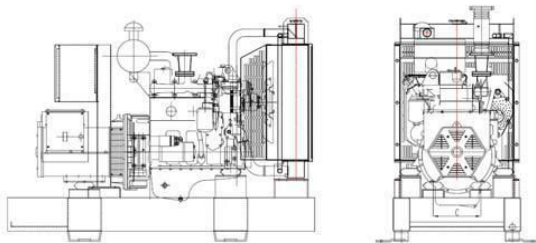

| Open Type | | |
|-----------------|----------------|------|
| Overall Size: | 2030×730×1565 | (mm) |
| Weight: | 870 | KG |
| Soundproof Type | | |
| Overall Size: | 2400×1000×1560 | (mm) |
| Weight: | 1370 | KG |

Standard Control Panel



KAIHUA uses micro processing technique integrating digital,intelligent and network techniques which can carry out functions including auto start/stop, data measure, alarming. The controller uses LCD display, optional Chinese and English display interface with operation easy and reliable. It can be widely used in all types of generator automatic control system for compact structure, advanced circuits, simple connections and high reliability

Auto Module Control Panel



Auto Module Control Panel is the configuration for nobody on duty controlling generators. This kind of panel adopts auto module control system,with large LCD display to show the menu.
 Features: MRS10-can receive remote output signal from ATS and realize auto start and stop of generators.MRS16-can realize all functions of MRS10, add RS232 interface which can communicate with PC to realize remote operation.AMF25-Auto Mains Failure controller, can realize all functions of MRS16, furthermore can detect ATS and control directly

Typical Projects



20 units perkins gensets exported to Tanzania



500KW perkins gensets exported to Iran



1250KW perkins gensets exported to Pakistan

Test Center

